

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 34 TOWNSHIP 16 RANGE 5

DATE: 9-12-96 -- 6-7-04

PARTY CHIEF: Wilcoxon

CREW: Survey mark nail over

TYPE OF MARKER: Harrison 3" dn



METHOD OF ESTABLISHMENT: County: 10-21-86

IN. S.P.C. E ZONE, NAD 83

NAME: 16053408

N: 503416.9910(m)

E: 74713.9340(m)

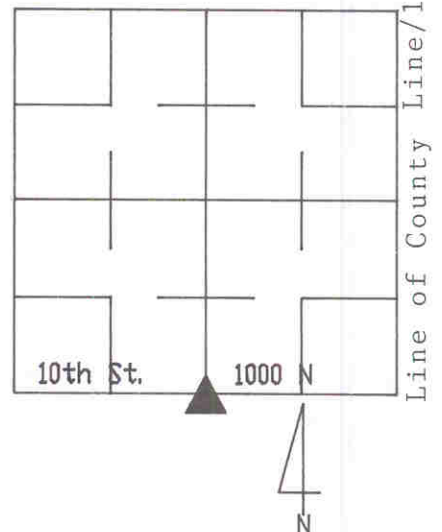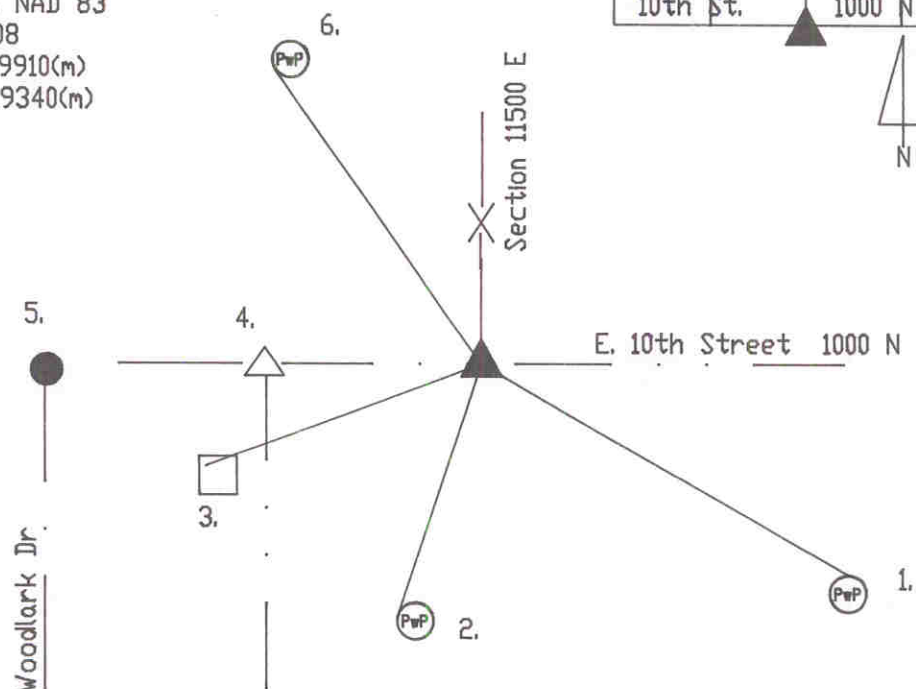

Set post 1820 by Hendricks with witnesses: 16" sugar maple N 75 W 15 links, 30" elm S 46 E 23 links per Marion County Atlas, pg. 15. Coyner 4/30 to 5/1 called stone fd. per Warren Township Legal Survey Book, pg. 61. 10-18-57 called stone. 4-19-76 called stone 10" dn. NOTE: This is a double corner and lies 30.19' E of NQ 3-15-5. Excavated 10-21-86 stone fd 15" dn. Harrison set 10-21-86. Re-tied 9-12-96.

HC653408

REF.	DISTANCE	DESCRIPTION
1.	46.15'	PK N PwP#14-521E 12'up
2.	42.40'	PK W PwP#241-521E 3'up
3.	58.73'	NW bolt 'x' street light base
4.	30.19'	Due W to N Q 3-15-5 3" dn (Harrison)
5.	67.70'	Due W to PK nail C/L Woodlark Drive
6.	43.22'	'x' steel collar PwP#240-521E @ ground